



A

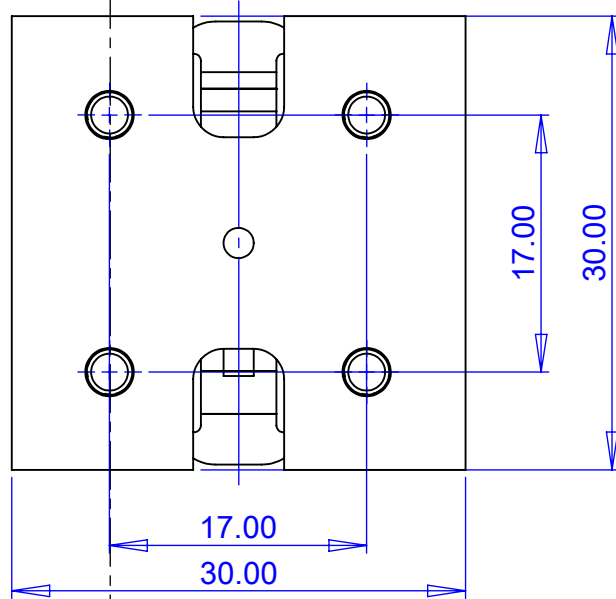


A

2.50 2.50

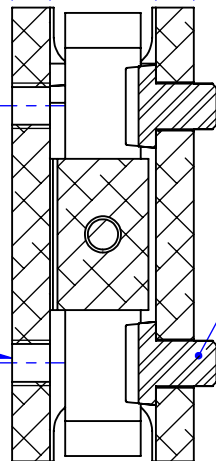


4 x Access for
a flat screw driver
M3.00x4


COUPE A-A
Screw M3 to fix the mechanism.

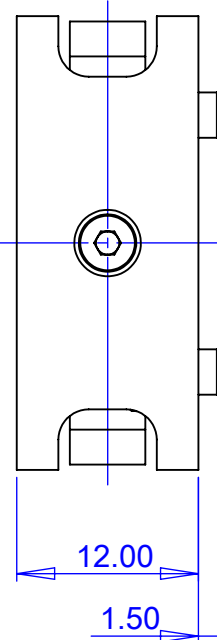

4 x M3.00
Payload interface

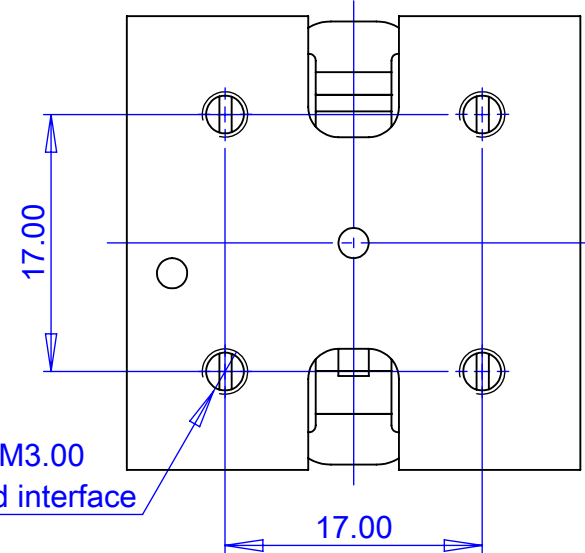

Electrical connection:
2 AWG30
100mm long with diam1 banana plug

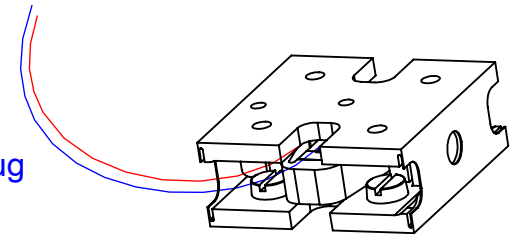

Note:
The X60S is delivered with 4x M3 fixing screws.

Dessine par / Drawn by fbourgain	Matiere / Material Traitement / Treatment	Titre ICD_X60S		
Verifie par / Checked by APages	Finition / Finish			
Valide par / Approved by SRowe	Tolerances generales / General Tolerances Longueur / Length ±0.10 mm Angles ±0.5°	Date 25/03/2015	Reference / Revision 012257 / A.03	Format A4 Echelle/Scale 2:1
	Masse 23.20 g			Page 1/1



CONFIDENTIEL INDUSTRIE
Ce document est la propriété
de CEDRAT TECHNOLOGIES.
Ne peut être communiqué
sans autorisation écrite.